

BALUSTRADE WALL POINT FIXINGS




250

Technical Specifications

- Multiple adjustments possible:
horizontal, vertical, depth.
- Public Installation (establishment open to public).
- Fast installation.
- Available in Stainless Steel 304 and 316.
- Validated glass sizes:
Height: 1 260 mm
Length: 1 000 to 1 400 mm


Avis Technique from AGC n° 2/15-1670

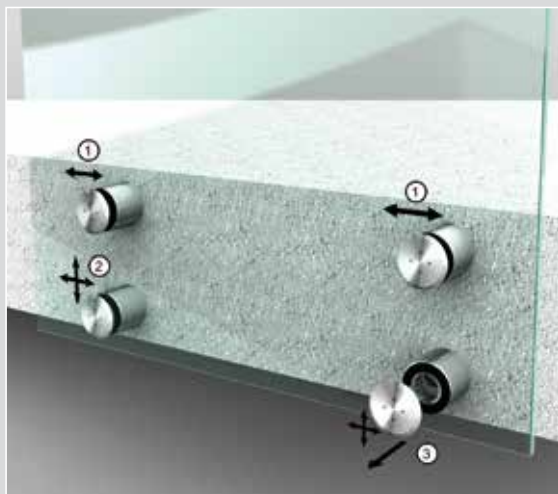


SLAB NOSING RAILING \varnothing 50 mm



Size

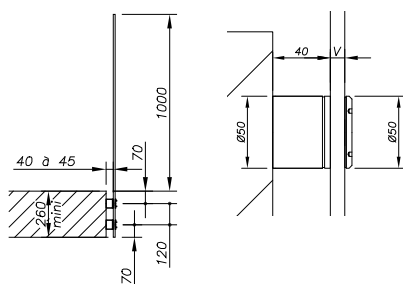

Drilling Plan

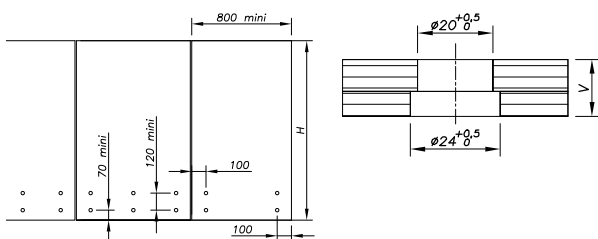

Glass thickness

12 > 25,52 mm
25,52 > 31,52 mm

Reference

00 01 10 00 01 10 A4*
00 01 10-31 00 01 10-31 A4*

Other glass thickness upon request.


*A4 for Stainless Steel 316

Application without Tests Reports


SLAB NOSING RAILING WITHOUT ADJUSTMENT \varnothing 50 mm



Size



Drilling Plan



Glass thickness

17,52 > 21,52 mm
22 > 25,52 mm

Reference

00 01 20
00 01 20-25

Other glass thickness upon request.



BALUSTRADE
 WALL POINT FIXINGS

Extract from the Avis Technique AGC n°2/15-1670

PVB DG 41 INTERLAYER			
Usages	0.6 to 1.8 kN	1.0 to 3 kN	1.7 to 5.1 kN
NFP 06-001	RENTAL HOUSING	PUBLIC AREAS	STADIUM STANDS
Features according NF EN 1991-1 and 1991-2 and NF P06-111-2/A1	A and B	C1 to C4 D	-
Composition	10.10 / 12.12 / 15.15	10.10 / 12.12 / 15.15	10.10 / 12.12 / 15.15
Minimal size (mm)	500 / 500 / 900	500 / 500 / 900	1 100 / 500 / 900

SENTRY GLASS INTERLAYER			
Usages	0.6 to 1.8 kN	1.0 to 3 kN	1.7 to 5.1 kN
NFP 06-001	RENTAL HOUSING	PUBLIC AREAS	STADIUM STANDS
Features according NF EN 1991-1 and 1991-2 and NF P06-111-2/A1	A and B	C1 to C4 D	-
Composition	10.10 / 12.12 / 15.15	10.10 / 12.12 / 15.15	10.10 / 12.12 / 15.15
Minimal size (mm)	1 100 / 800 / 500	1 100 / 800 / 500	1 100 / 500 / 900