

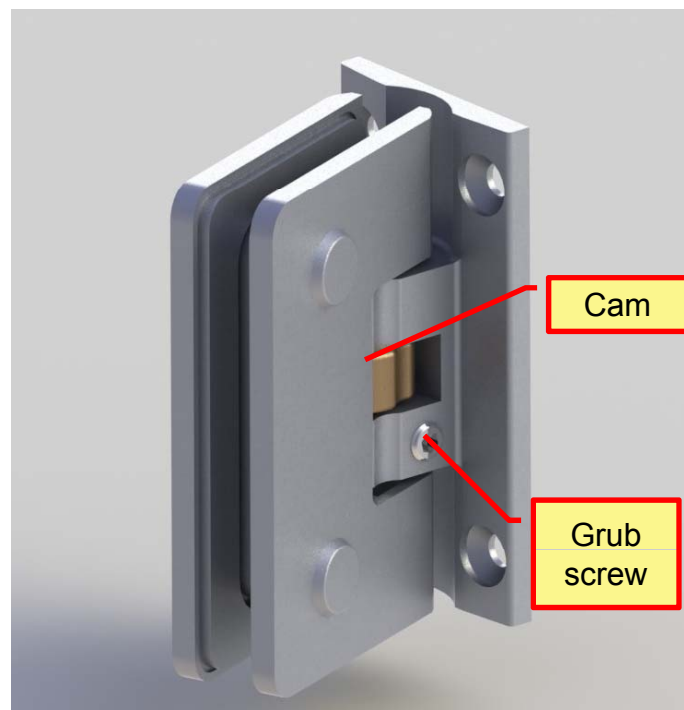


# Adjustment of 850R

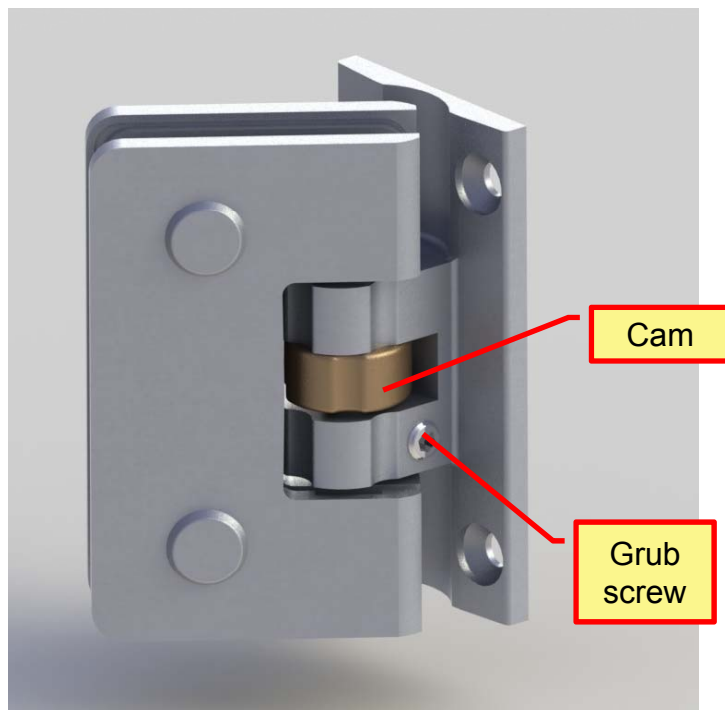

The grub screw is NOT tightened: the hinge and the cam are free to rotate.


# Adjustment of 850R

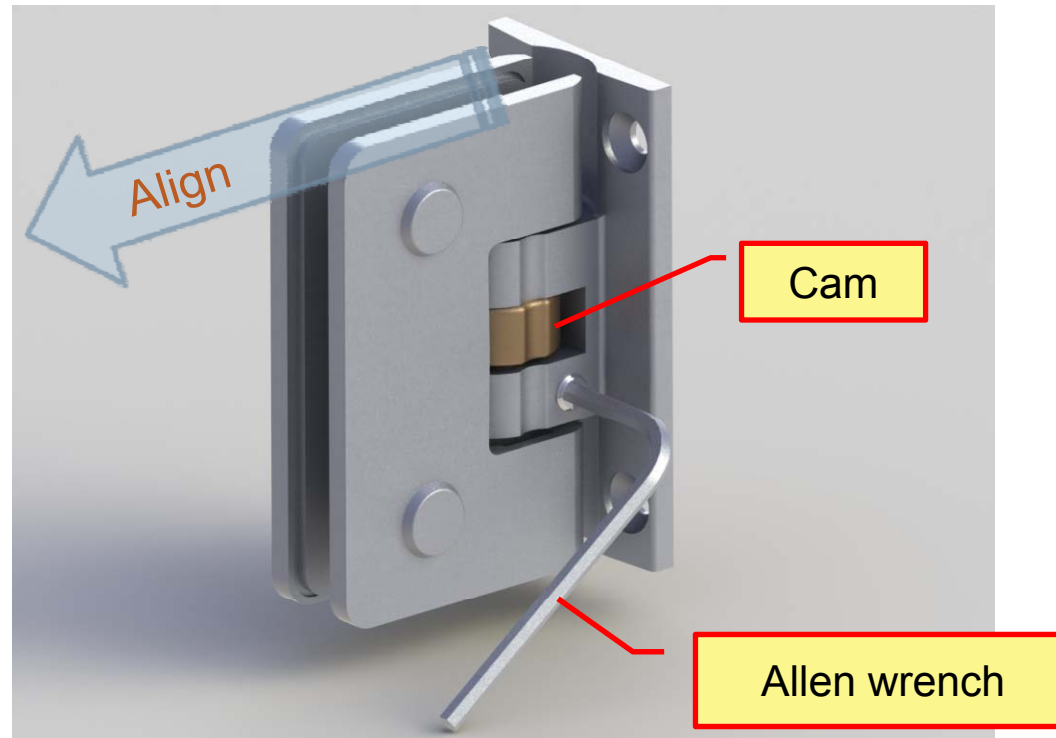

In order to align the hinge 850R we have to position the hinge first, then we have to tighten the grub screw strongly using the allen wrench.

What happens during this action? ...Let's see it!

- While screwing the grub screw let the plug move so that it engraves the cam, blocking it in the desired position.

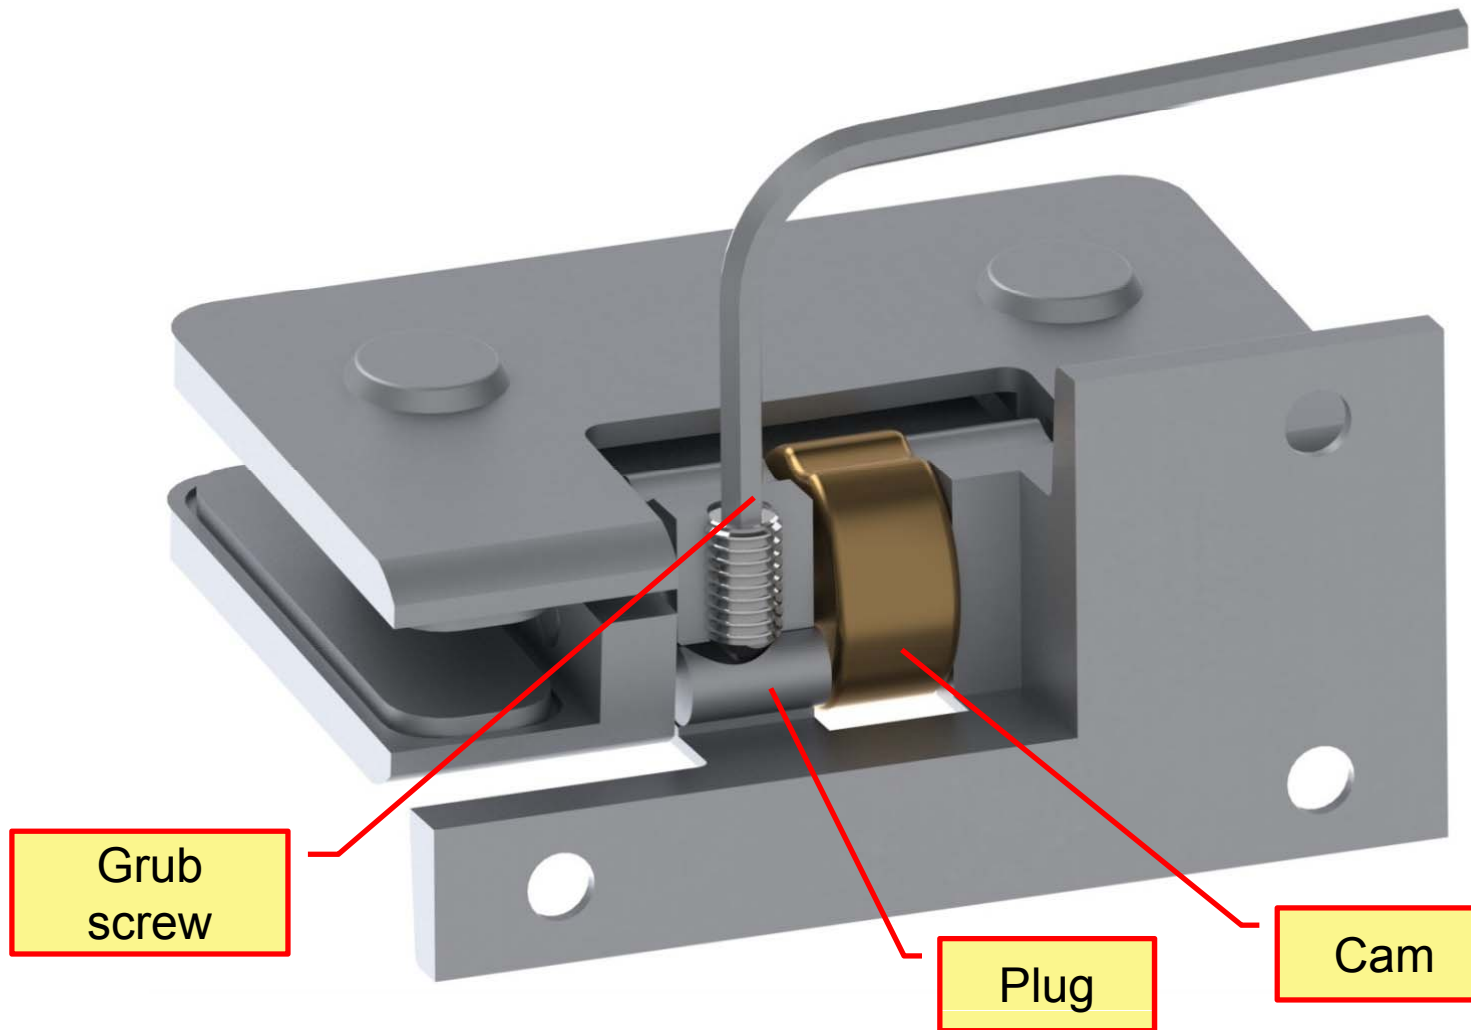

- The grub screw has to be strongly and safety tightened, so that it does not become loose during the normal functioning of the hinge, causing thus the cam movement and the disalignment of the hinge.

